



Supplemental Instructions


Pan Doors

 CAUTION	<p>Higher wind pressures and larger doors require additional reinforcement.</p> <p>Premature failure of door system may result from improper application.</p> <p>See chart in lower left corner of drawing sheet one for the approved wind pressures and door sizes.</p>
 WARNING	<p>These supplemental instructions do not contain basic door installation steps and related safety information.</p> <p>Failure to follow basic installation steps and related safety information may result in injury or death.</p> <p>Door installers must follow a primary instruction manual for basic door installation steps and related safety information.</p>

The correct selection of door and framing materials, in adherence with local building code directives, is the responsibility of the building owner/designer. Use of a reinforced garage door does not constitute automatic compliance with any building code. Local building code officials determine compliance criteria.


A locking system must be installed if the door is not electrically operated.

See drawing for stop molding requirements, on doors not more than 1" wider than opening. When using stop molding, secure molding with minimum 8d nails or 2-1/2" long screws.



John E. Scates
 10/21/2011
 John E. Scates, P.E.
 3121 Fairgate Drive
 Carrollton, Texas 75007
 TXPE 56308, F-2203

Professional Engineer's seal
provided only for verification of
windload construction details


For use with single end stiles
(hinges shown with four screws, see drawing for screw quantity requirements)

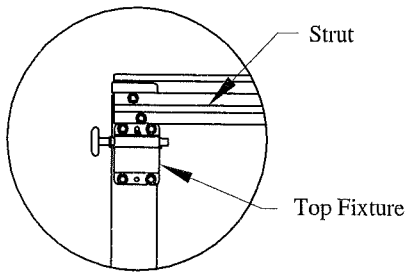


Strut above top fixture

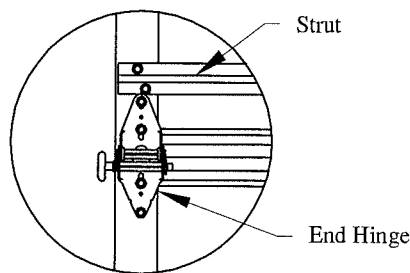


Strut above hinge

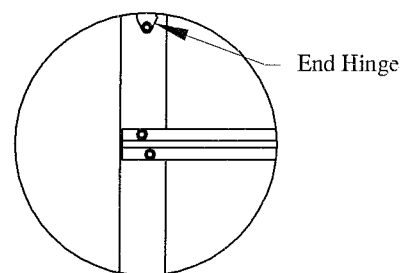


Strut in center of section

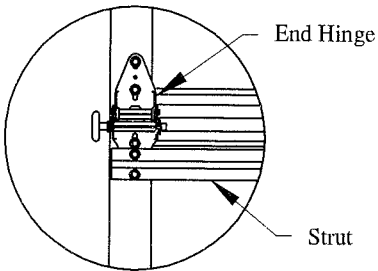

Strut on bottom half of hinge

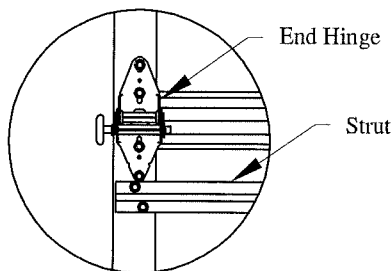


Strut below hinge

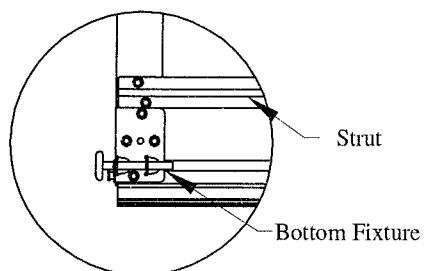


Strut above bottom fixture


For use with double end stiles
(hinges shown with six screws, see drawing for screw quantity requirements)

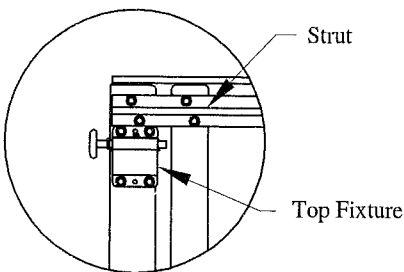


Strut above top fixture

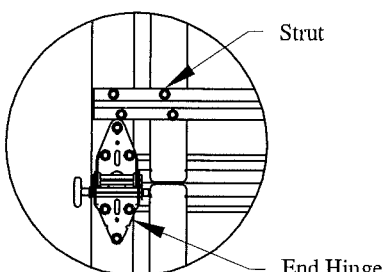


Strut above the hinge

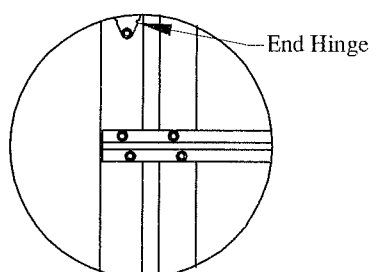


Strut in center of section

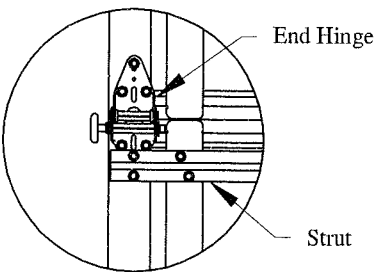


Strut on bottom half of hinge

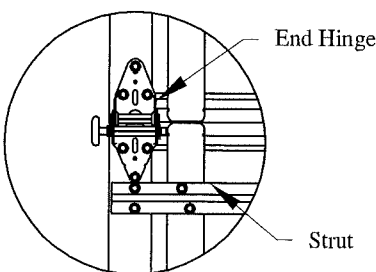

Strut below hinge

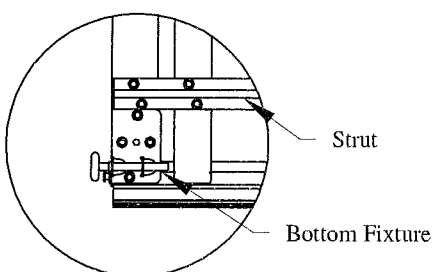

Strut above bottom fixture

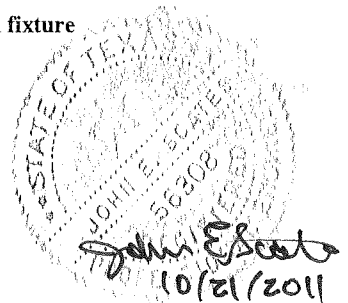

Professional Engineer's seal
 provided only for verification of
 windload construction details

John E. Scates, P.E.
 3121 Fairgate Drive
 Carrollton, Texas 75007
 TXPE 56308, F-2203